

ROOF TO WALL TRANSITION

*NOTE:USE FIELD APPLIED SPRAY FOAM AS NEEDED TO MAINTAIN VAPOR BARRIER AND INSULATION CONTINUITY

NON-SKINNING SEALANT: REQUIRED FOR AIR BARRIER, RECOMMENDED

18GA PANEL SUPPORT

(AVAILABLE FROM PIP)

FOR ALL OTHER USES.


WALL PANEL

NON-SKINNING SEALANT:
REQUIRED FOR AIR
BARRIER, RECOMMENDED
FOR ALL OTHER USES.

CMU BASE CHANNEL

*NOTE-USE FIELD APPLIED SPRAY FRAM AS NEEDED TO


*NOTE:USE FIELD APPLIED SPRAY FOAM AS NEEDED TO MAINTAIN VAPOR BARRIER AND INSULATION CONTINUITY

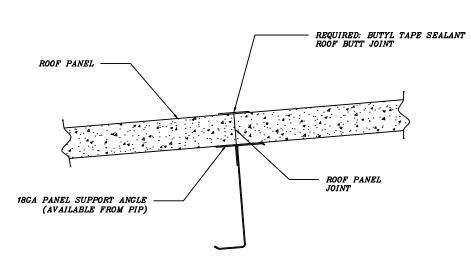

*NOTE:USE FIELD APPLIED SPRAY FOAM AS NEEDED TO MAINTAIN VAPOR BARRIER AND INSULATION CONTINUITY

PANEL END LAP: ROOF

*NOTE:USE FIELD APPLIED SPRAY FOAM AS NEEDED TO MAINTAIN VAPOR BARRIER AND INSULATION CONTINUITY

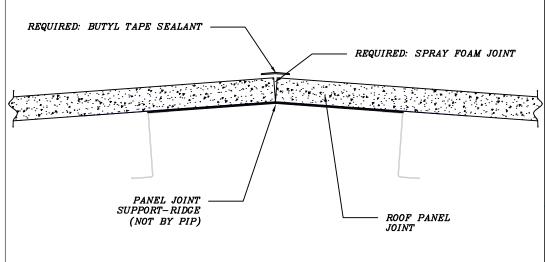


ROOF PANEL

NON-SKINNING SEALANT: REQUIRED FOR AIR BARRIER, RECOMMENDED FOR ALL OTHER USES.

WALL PANEL

PANEL END JOINT: RIDGE

*NOTE:USE FIELD APPLIED SPRAY FOAM AS NEEDED TO MAINTAIN VAPOR BARRIER AND INSULATION CONTINUITY

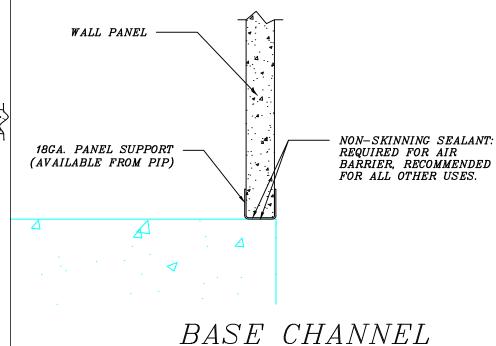

ISSUE: DWN: CHK: ENG: MFC: DATE:

PROJECT NAME:

CUSTOMER:

PACIFIC INSULATION PRODUCTS

*NOTE:USE FIELD APPLIED SPRAY FOAM AS NEEDED TO MAINTAIN VAPOR BARRIER AND INSULATION CONTINUITY

561 STRANDER BLVD TUKWILA, WA 98188

PHONE: 877-300-3794 FAX: 425-905-7272