


# Step 1: Rough Opening Flashing System Commercial Window

VaproFlashing SA Self-Adhered scraps adhere to cover pre-punched metal stud holes

Sheathing in "as new" condition

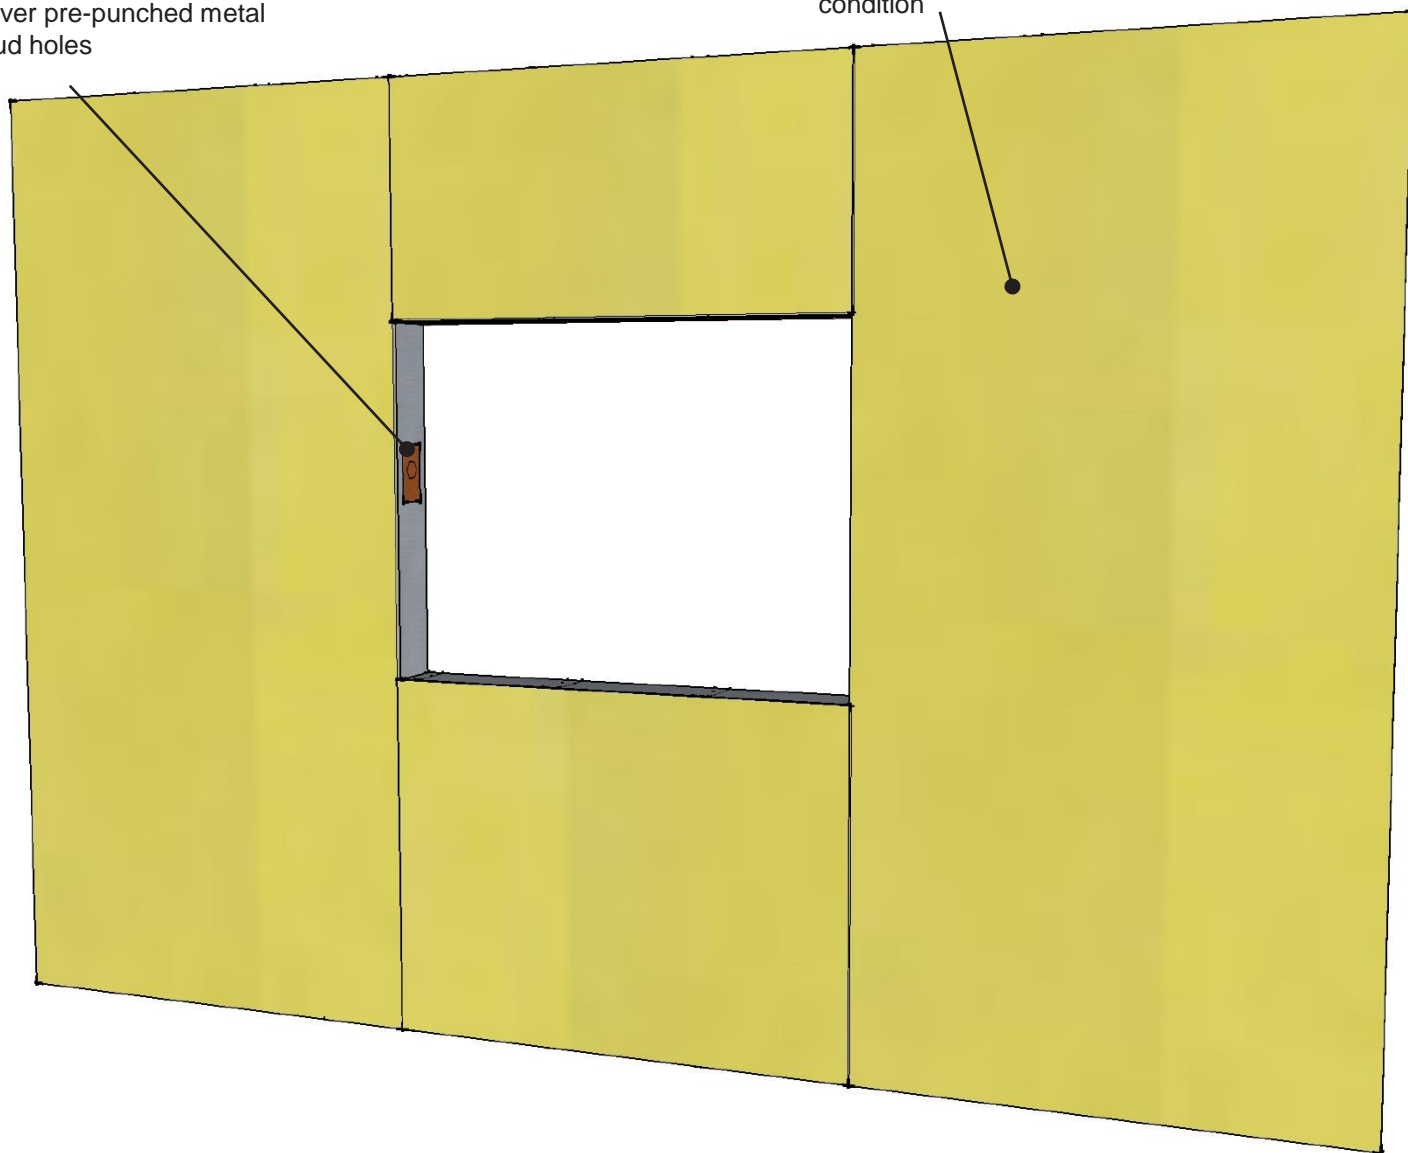

## VAPROLIQUI-FLASH™

### PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

### DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 03.15.16


REF: 111-1

Always check [www.VaproShield.com](http://www.VaproShield.com) for the latest details and installation instructions

## Step 2: Rough Opening Flashing System Commercial Window

VaproFlashing SA Self-Adhered scraps adhere to cover pre-punched metal stud holes

Sheathing in "as new" condition

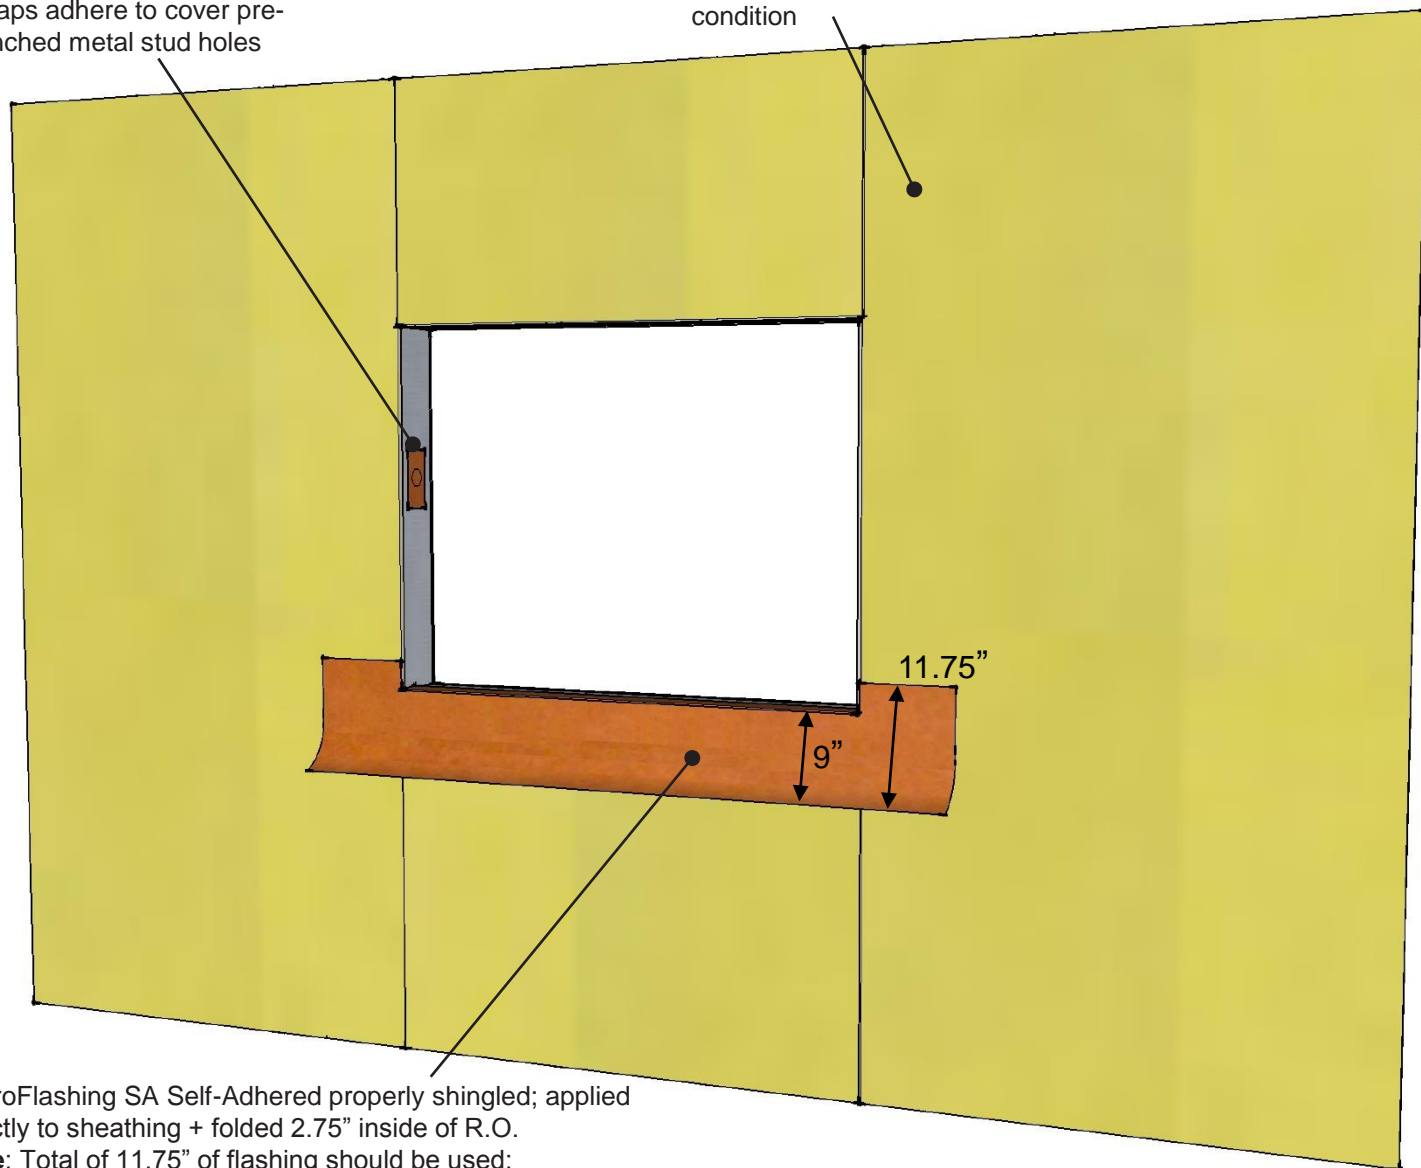

VaproFlashing SA Self-Adhered properly shingled; applied directly to sheathing + folded 2.75" inside of R.O.

**Note:** Total of 11.75" of flashing should be used:

- 9" of flashing should be left on the face of the sheathing
- 6" of release film from the bottom of the flashing to be left attached for shingling over membrane.

**VAPROLIQUI-FLASH™**

### PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

### DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 03.15.16


REF: 111-2

Always check [www.VaproShield.com](http://www.VaproShield.com) for the latest details and installation instructions

## Step 3: Rough Opening Flashing System Commercial Window

VaproFlashing SA Self-Adhered scraps adhere to cover pre-punched metal stud holes

Sheathing in "as new" condition

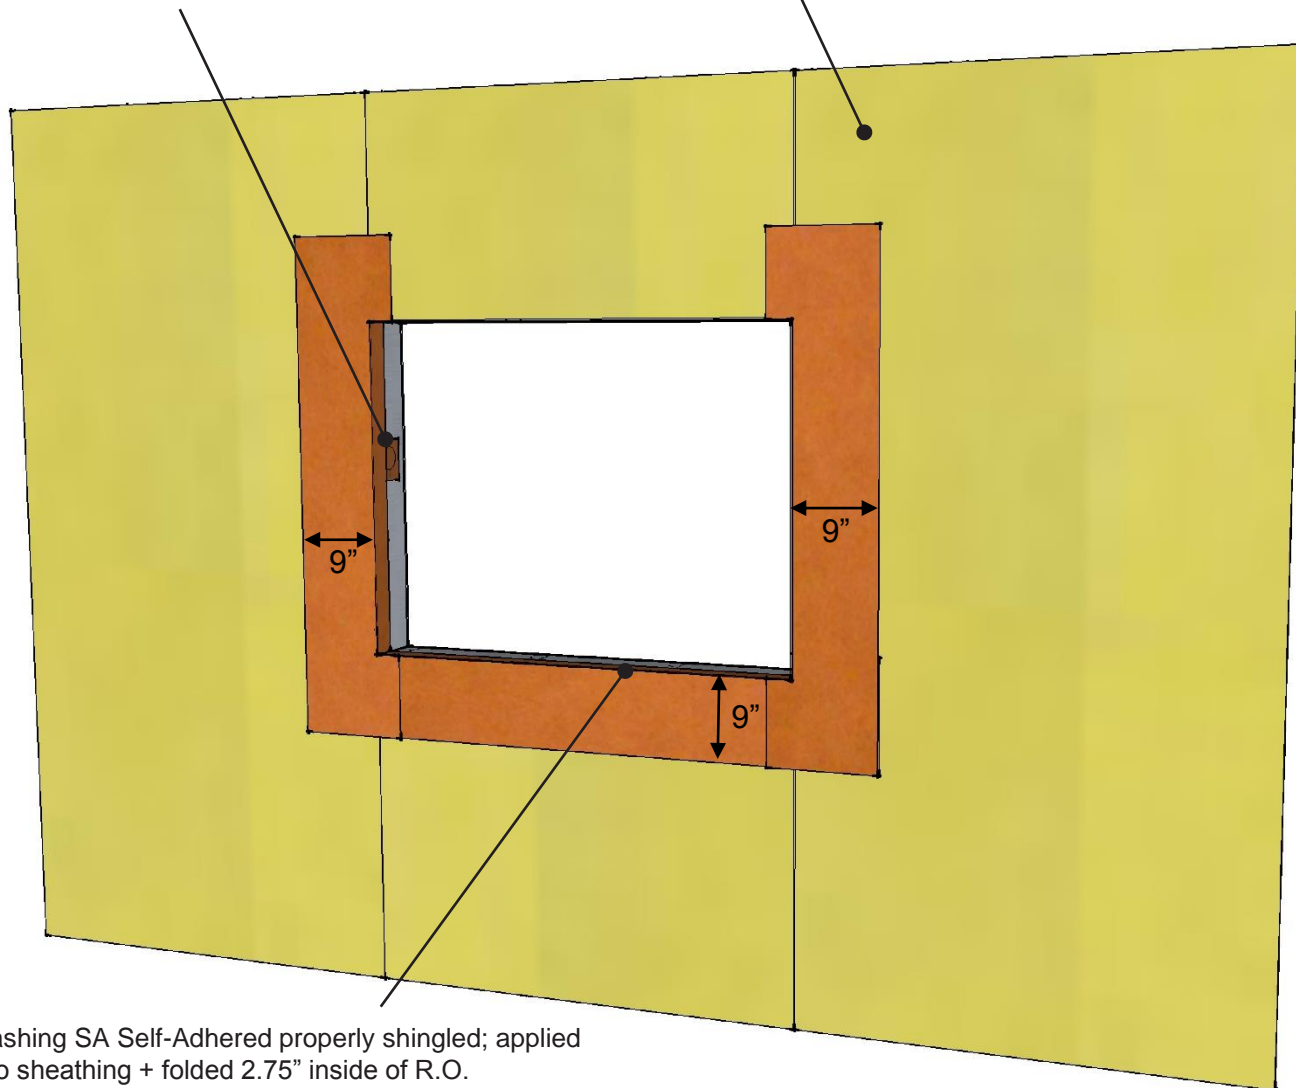

VaproFlashing SA Self-Adhered properly shingled; applied directly to sheathing + folded 2.75" inside of R.O.

**Note:** Total of 11.75" of flashing should be used:

- 9" of flashing should be left on the face of the sheathing
- 6" of release film from the bottom of the flashing to be left attached for shingling over membrane.

**VAPROLIQUI-FLASH™**

### PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

### DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 03.15.16


REF: 111-3

Always check [www.VaproShield.com](http://www.VaproShield.com) for the latest details and installation instructions

## Step 4: Rough Opening Flashing System Commercial Window

VaproFlashing SA Self-Adhered scraps adhere to cover pre-punched metal stud holes

Sheathing in "as new" condition

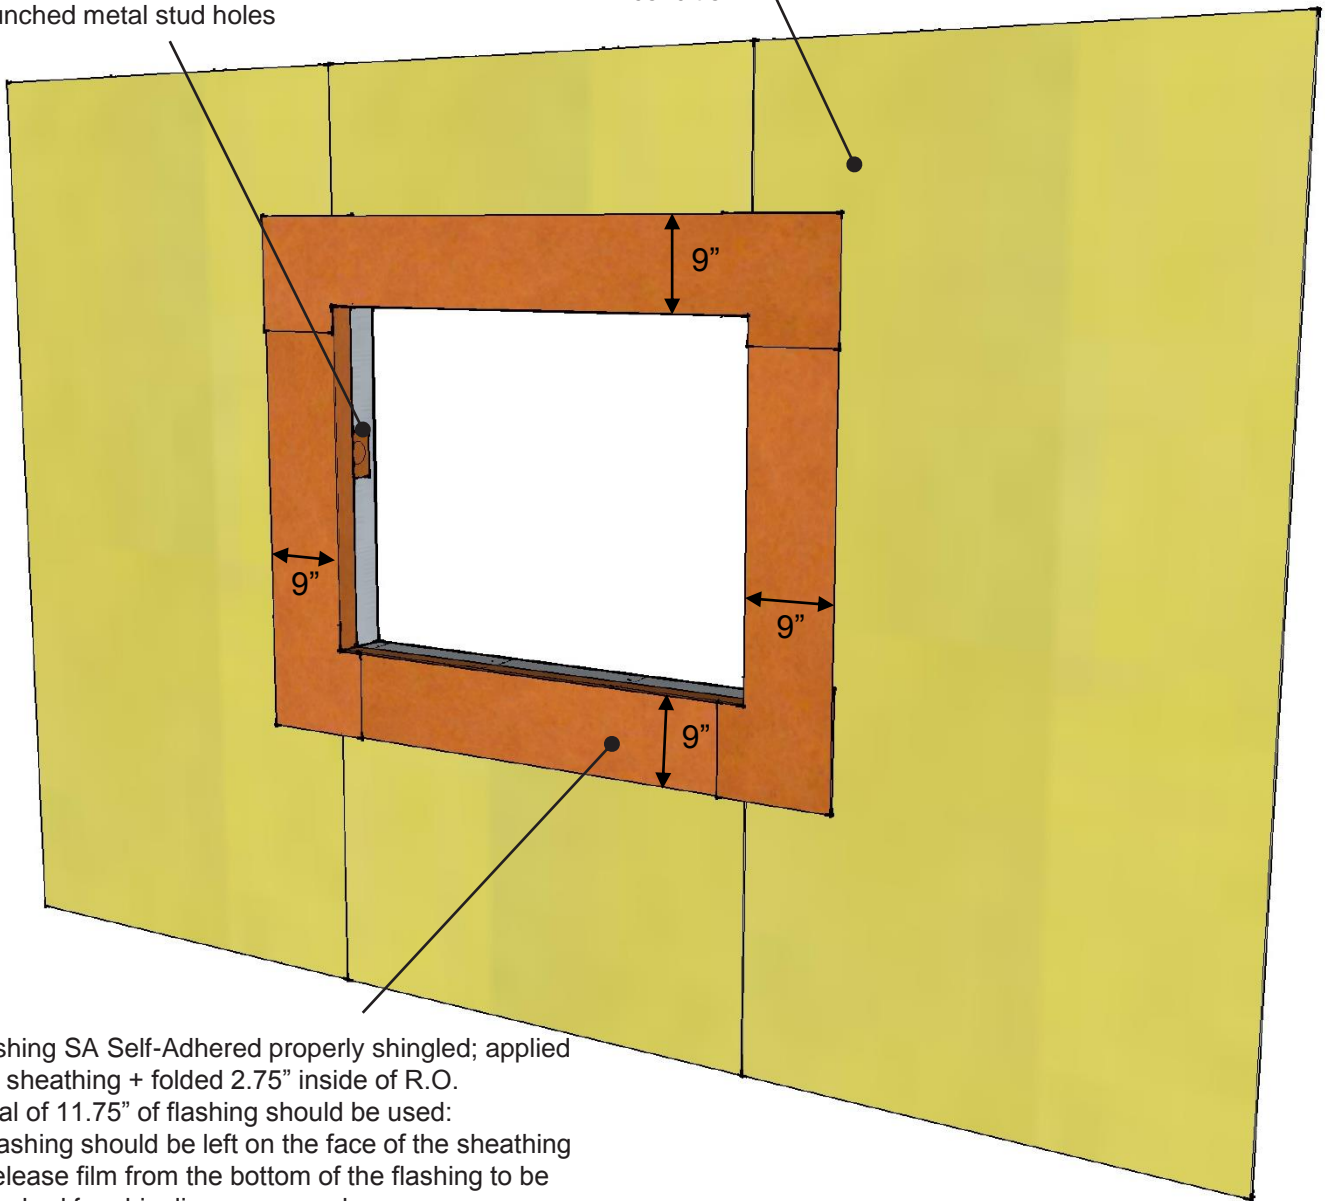

VaproFlashing SA Self-Adhered properly shingled; applied directly to sheathing + folded 2.75" inside of R.O.

**Note:** Total of 11.75" of flashing should be used:

- 9" of flashing should be left on the face of the sheathing
- 6" of release film from the bottom of the flashing to be left attached for shingling over membrane.

**VAPROLIQUI-FLASH™**

### PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

### DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 03.15.16


REF: 111-4

Always check [www.VaproShield.com](http://www.VaproShield.com) for the latest details and installation instructions

## Step 5: Rough Opening Flashing System Commercial Window

VaproLiqui-Flash  
full-coverage inside  
rough opening + 1" on  
face

Sheathing in "as new"  
condition

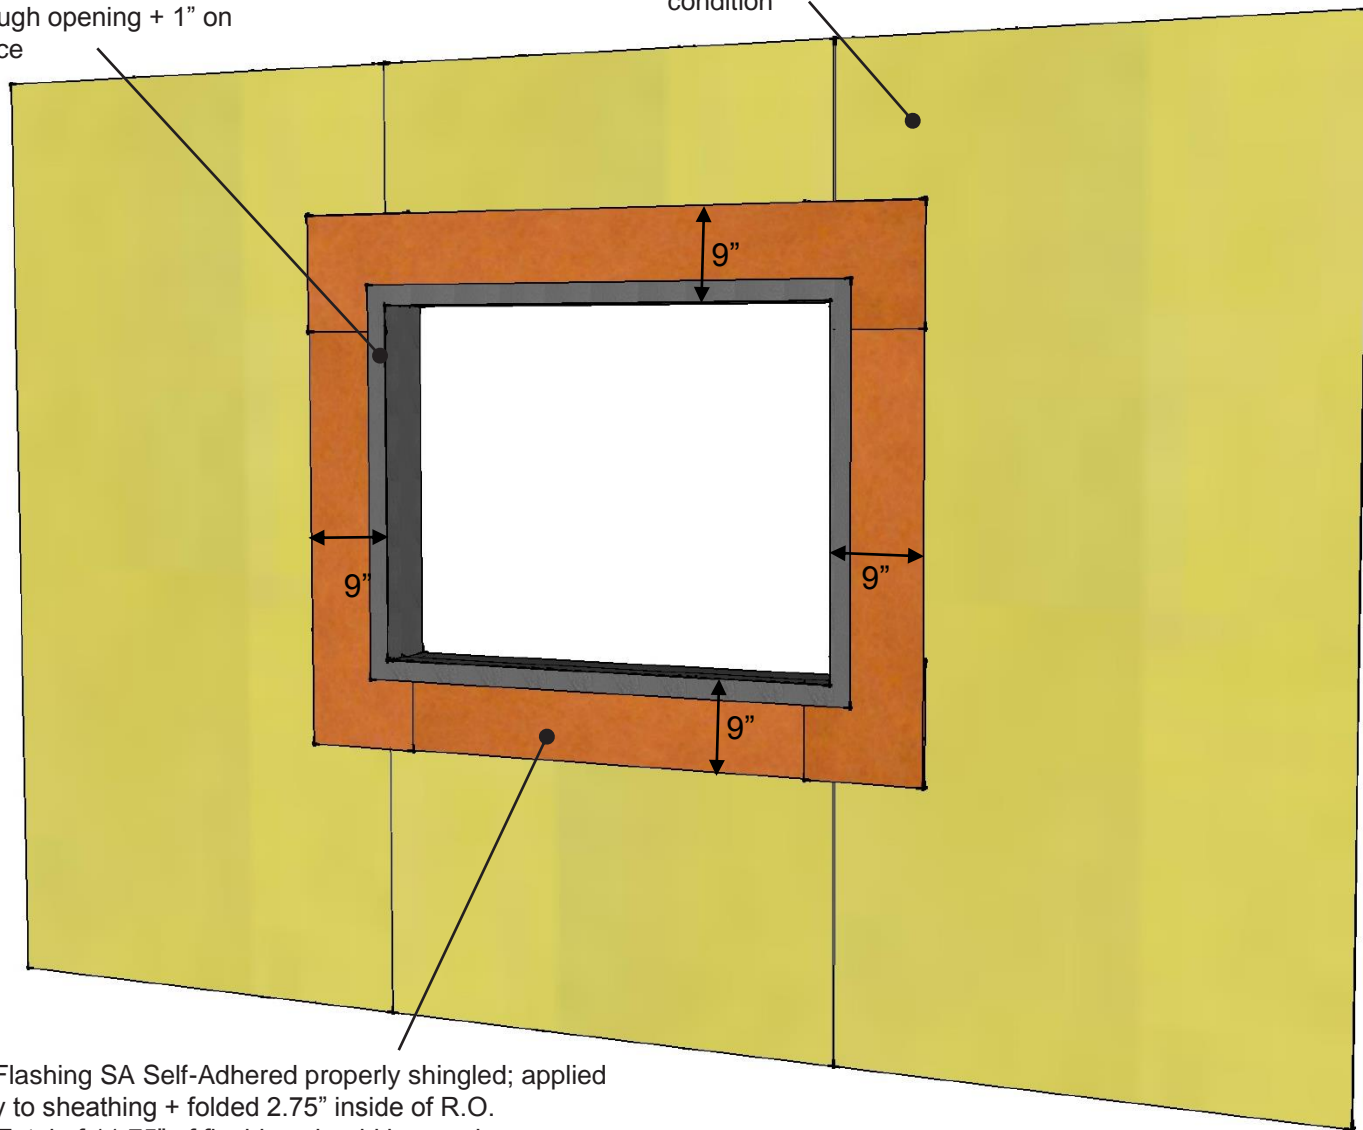

VaproFlashing SA Self-Adhered properly shingled; applied directly to sheathing + folded 2.75" inside of R.O.

**Note:** Total of 11.75" of flashing should be used:

- 9" of flashing should be left on the face of the sheathing
- 6" of release film from the bottom of the flashing to be left attached for shingling over membrane.

**VAPROLIQUI-FLASH™**

### PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

### DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR


DATE: 03.15.16

REF: 111-5

Always check [www.VaproShield.com](http://www.VaproShield.com) for the latest details and installation instructions



## Step 6: Rough Opening Flashing System Commercial Window

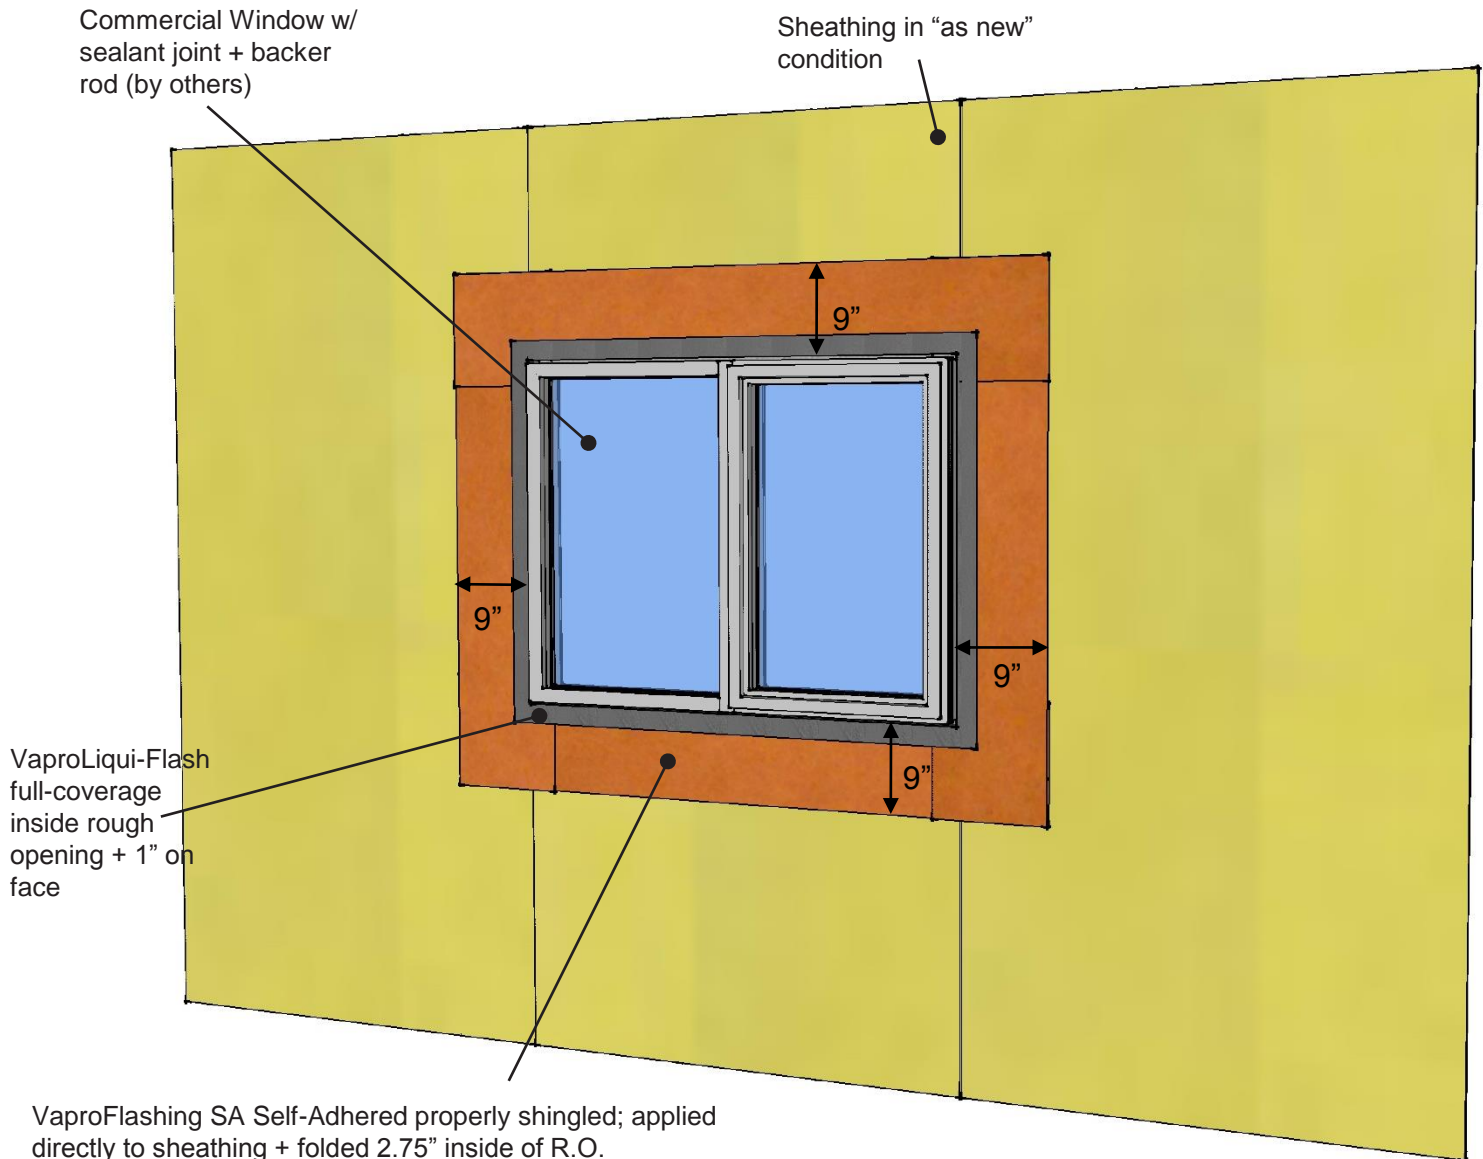

VaproFlashing SA Self-Adhered properly shingled; applied directly to sheathing + folded 2.75" inside of R.O.

**Note:** Total of 11.75" of flashing should be used:

- 9" of flashing should be left on the face of the sheathing
- 6" of release film from the bottom of the flashing to be left attached for shingling over membrane.

**VAPROLIQUI-FLASH™**

### PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

### DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.


DRAWN BY: AR

DATE: 03.15.16

REF: 111-6

Always check [www.VaproShield.com](http://www.VaproShield.com) for the latest details and installation instructions

## Step 7: Rough Opening Flashing System Commercial Window

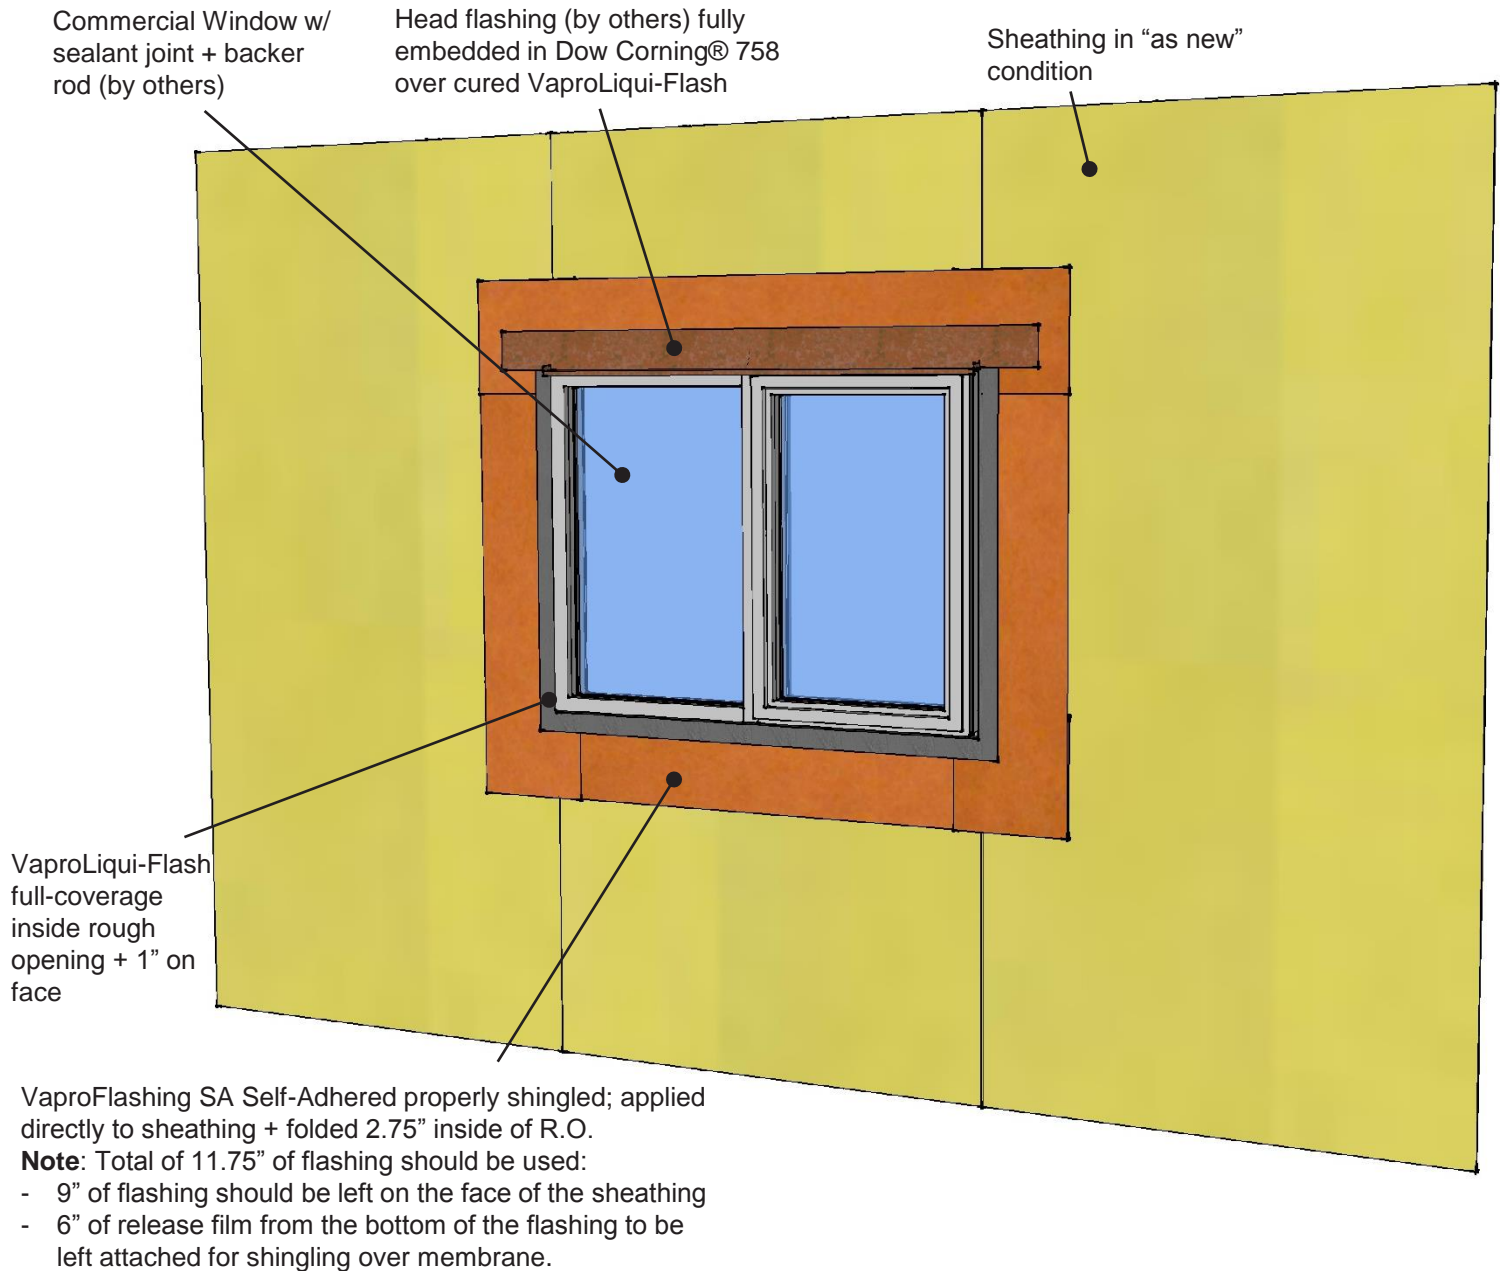

### VAPROLIQUI-FLASH™

#### PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

#### DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.


DRAWN BY: AR

DATE: 03.15.16

REF: 111-7

Always check [www.VaproShield.com](http://www.VaproShield.com) for the latest details and installation instructions

## Step 8: Rough Opening Flashing System Commercial Window

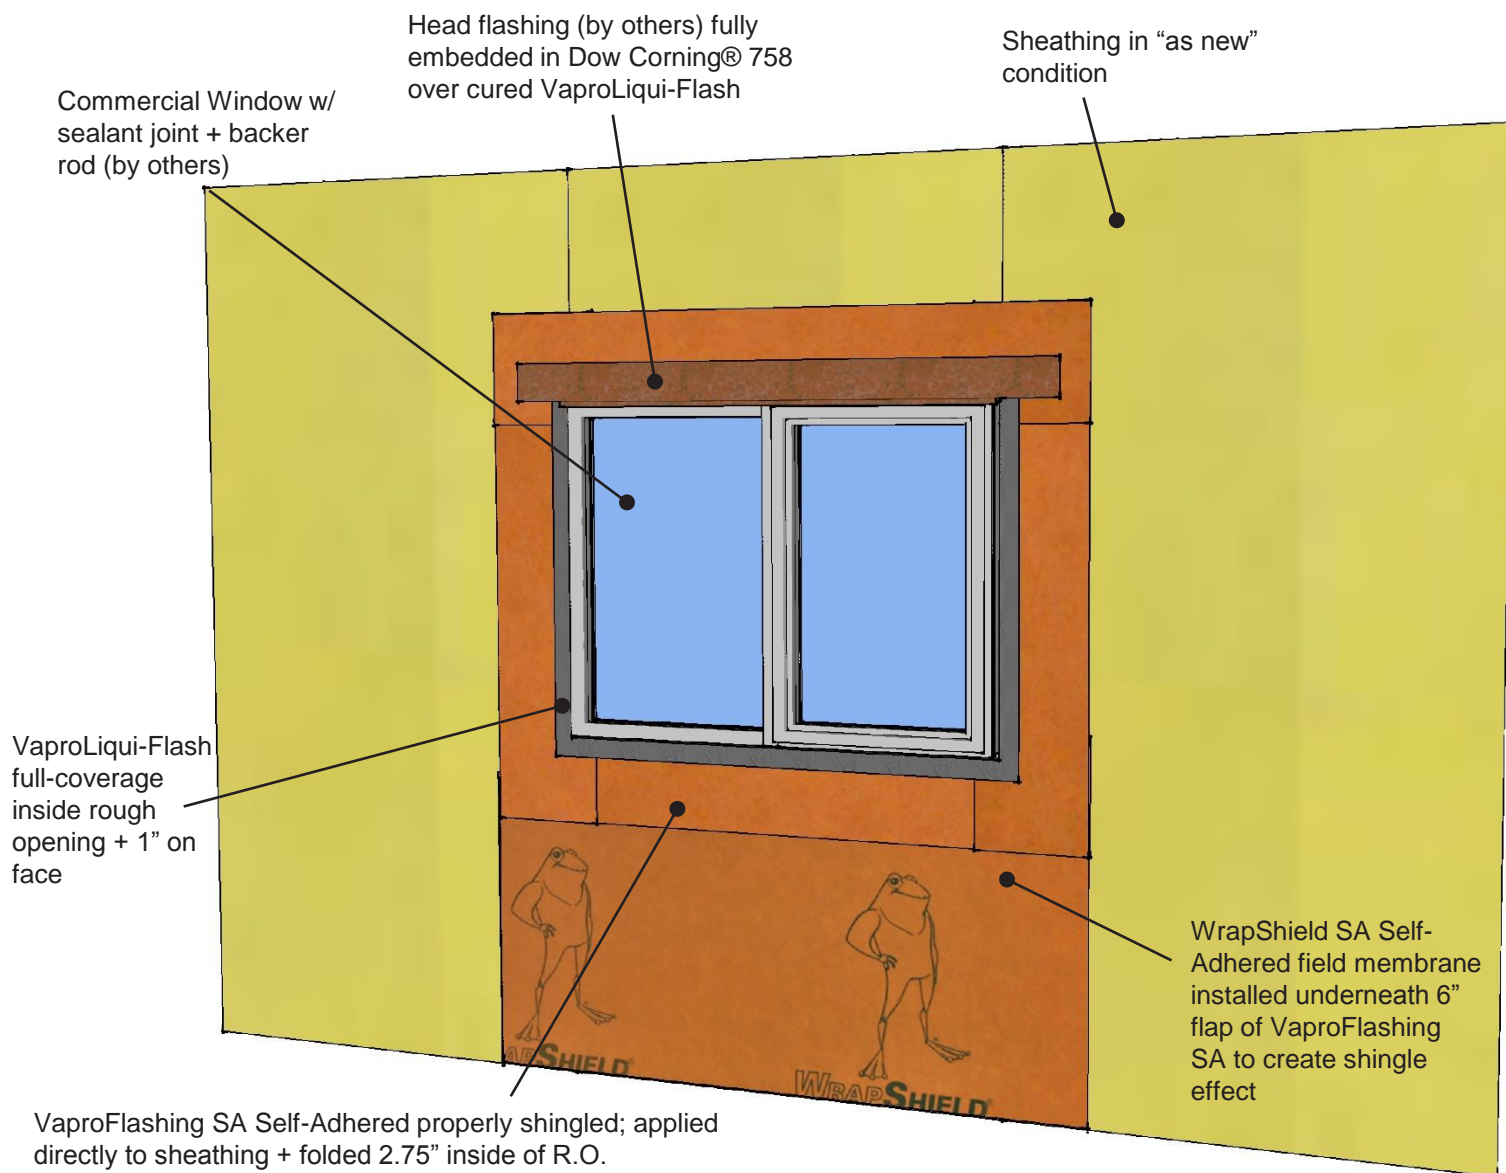

VaproFlashing SA Self-Adhered properly shingled; applied directly to sheathing + folded 2.75" inside of R.O.

**Note:** Total of 11.75" of flashing should be used:

- 9" of flashing should be left on the face of the sheathing
- Remove release film from flashing and adhere bottom 6" to field membrane.

**VAPROLIQUI-FLASH™**

### PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

### DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR


DATE: 03.16.16

REF: 111-8

Always check [www.VaproShield.com](http://www.VaproShield.com) for the latest details and installation instructions



## Step 9: Rough Opening Flashing System Commercial Window

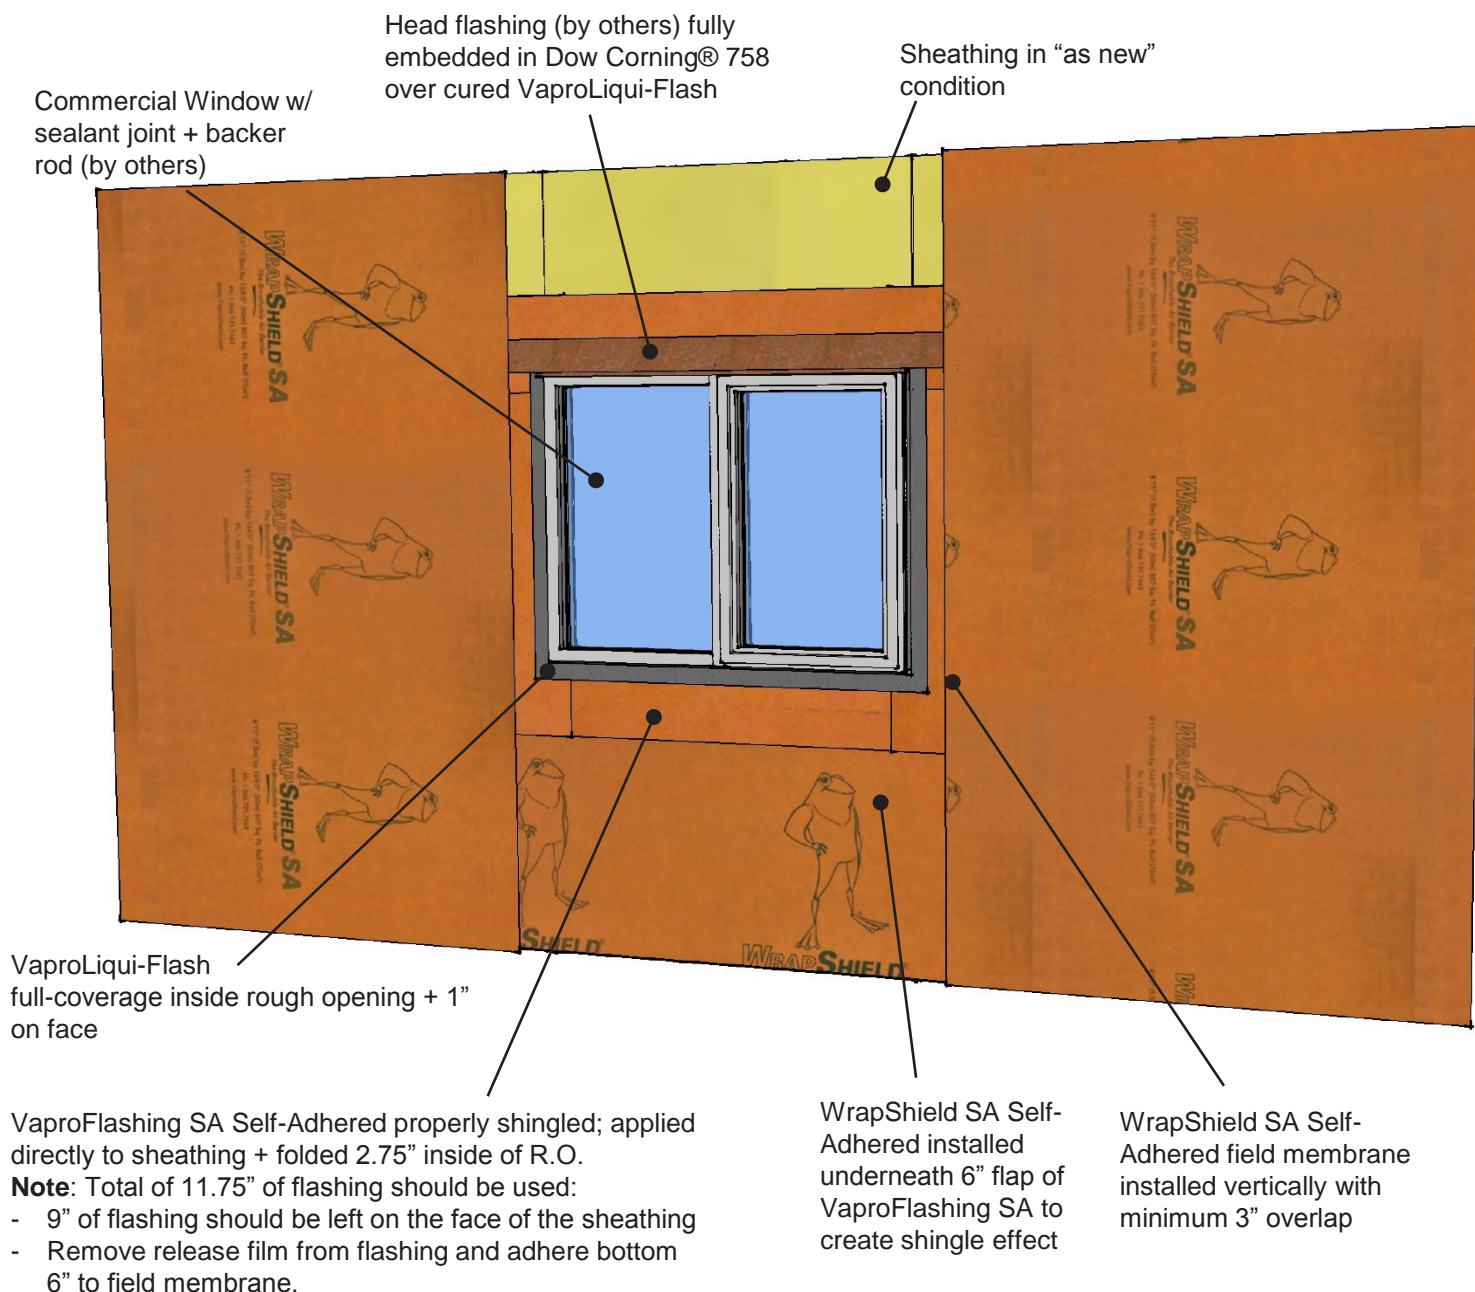

**VAPROLIQUI-FLASH™**

### PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

### DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.


DRAWN BY: AR

DATE: 03.16.16

REF: 111-9

Always check [www.VaproShield.com](http://www.VaproShield.com) for the latest details and installation instructions

# Step 10: Rough Opening Flashing System Commercial Window

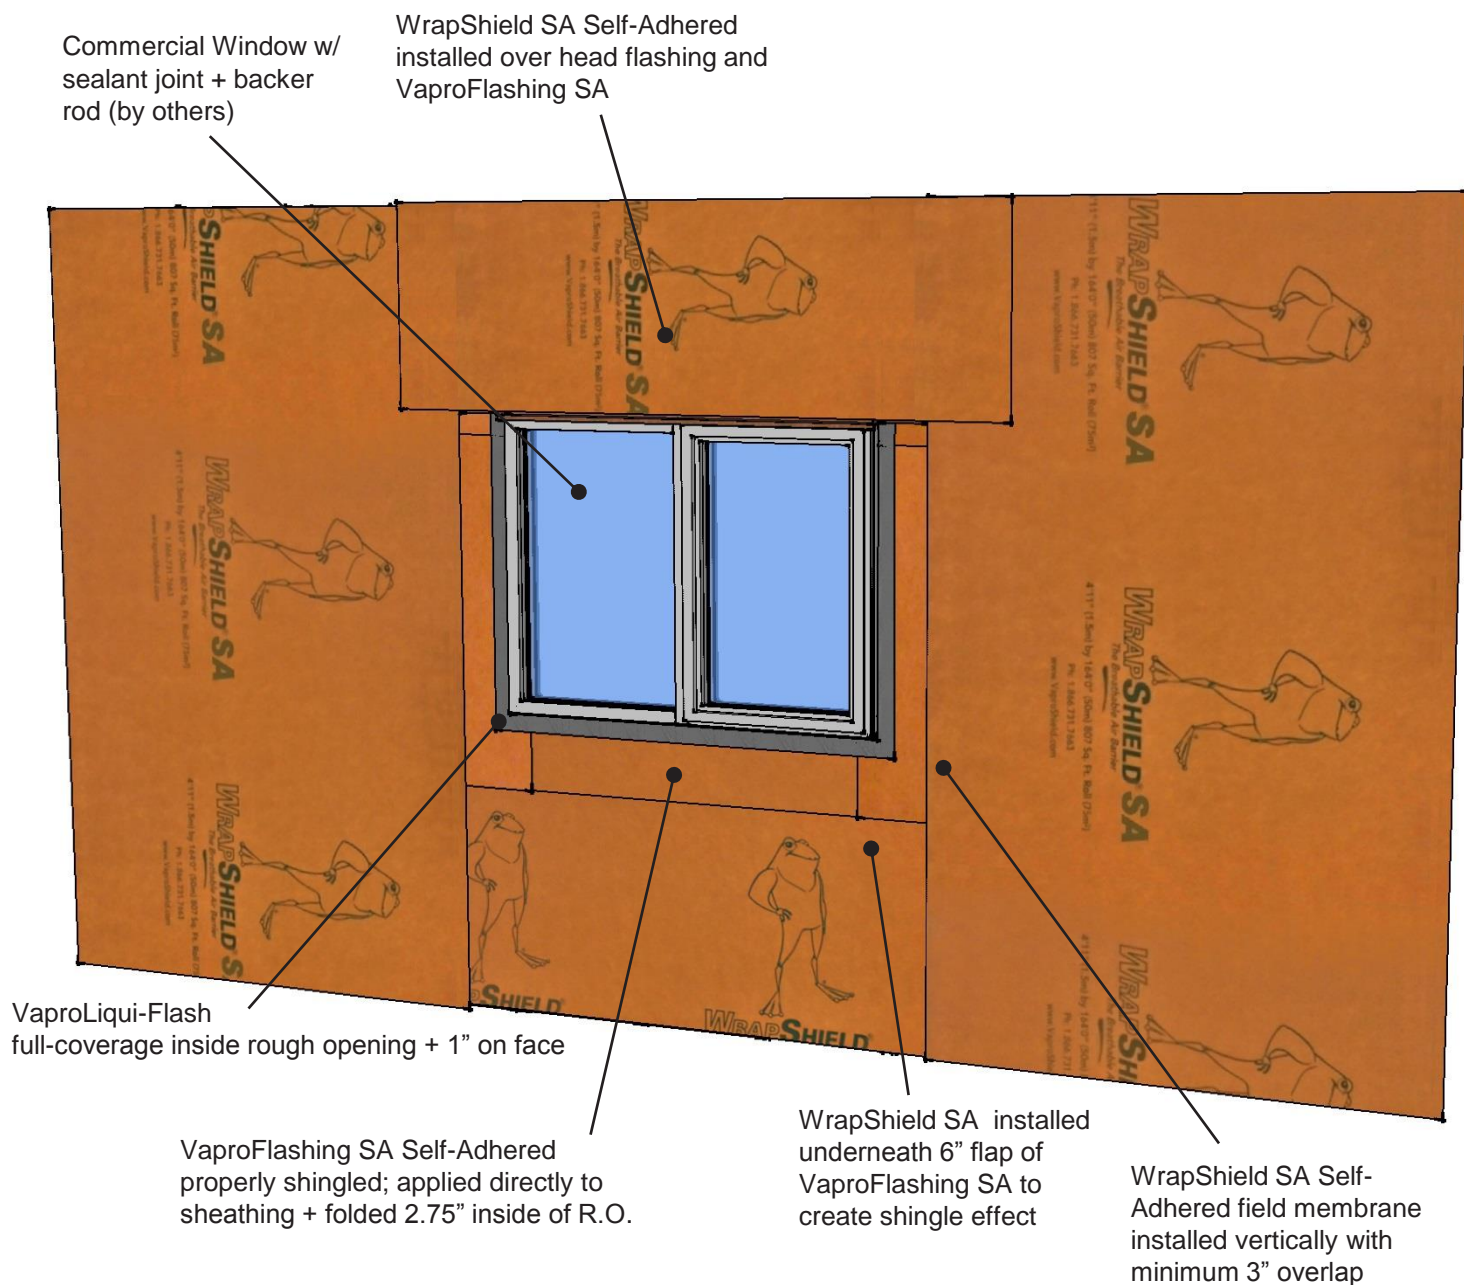

## VAPROLIQUI-FLASH™

### PRODUCT DESCRIPTION

VaproLiqui-Flash is a liquid applied, vapor permeable, waterproof, air barrier flashing system component for window and door rough openings. VaproLiquiFlash is designed to work with VaproFlashing and VaproShield field membranes as a complete system.

### DISCLAIMER

Detail sketch is generic, representing suggested best practices for VaproShield materials, and does not represent a specific job site condition and therefore may not be applicable to certain projects. Detail sketch is designed for use as a reference and must be approved by the designer/ consultant of record for each project prior to installation by the subcontractor. Changes and approvals of VaproShield details are the sole responsibility of the designer/consultant of record. VaproShield is **not** the designer of record for building enclosure details and takes no responsibility for the accuracy or interpretation of actual project site conditions.

DRAWN BY: AR

DATE: 03.16.16

REF: 111-10

Always check [www.VaproShield.com](http://www.VaproShield.com) for the latest details and installation instructions